

**fred modulo PS**




- **system power supply with integrated battery of the backup-protection from fred IT1 modules**
- **reverse battery protection**

**Technical data**

supply voltage	24 V <sub>DC</sub> ; 6,5 W
security	reverse battery protection 10 A fusible cut-out
battery	1 Ah, life time 2years
front panel	IP20
operating temperature	0° to 50°C
EMI-tests	EN61000-6-2, EN61000-6-4
protection rating	II according to VDE 0411
safety class	IP20 according to DIN40050
mounting	fixing on top hat rail DIN50022
dimension in mm (B x H x T)	35 x 127 x 142,7
weight.	300 g
order no.:	
<b>fred-PS</b>	<b>20.10.000.00</b>
<b>fred-IT-PS/CM-Kabel</b>	<b>24.00.20.500</b>

**Example**

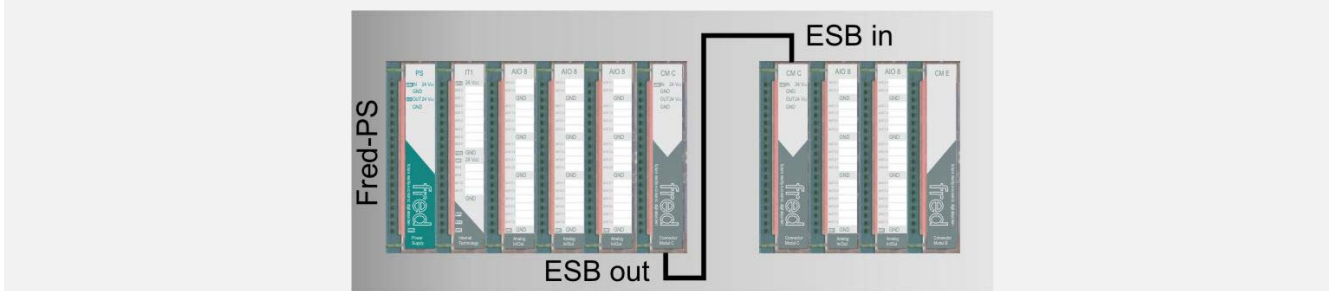

© In 2005 elrest GmbH. All rights reserved.

The information contained in this document can be changed without advance notice and represents non obligation on the part of elrest GmbH.

Images and descriptions as well as dimensions and technical data correspond to the circumstances or intentions at the time of the pressure of this brochure. Changes of every kind, particularly as far as they arise from technical progress, economic execution or similar are left. The external boarding of the devices takes place in sole responsibility.